

Features:


- Input Filter With Internal Capacitor
- Input / Output Isolation 1K Vdc Or 3K Vdc(H)
- Low Ripple And Noise
- 100% Burn-In
- Un-Regulated type
- Net Weight : 2.2 g / 2.7 g Typical
- 7 Pin SIL / 14 Pin DIL Package
- Custom Design Available

Technical Specification (1/2):

Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)	Output Current (mA) Max	Input Current @No Load (mA) Typ.	Input Current @Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%)Typ.
1) Single Output SIL Package Style								
B3-0505SS(H) LF	5	5	400	45	506	60	± 8	79
B3-0512SS(H) LF		12	167	42	500	100	± 8	80
B3-0515SS(H) LF		15	134	35	494	120	± 8	81
B3-1205SS(H) LF	12	5	400	26	211	60	± 8	79
B3-1212SS(H) LF		12	167	25	208	100	± 8	80
B3-1215SS(H) LF		15	134	24	206	120	± 8	81
B3-2405SS(H) LF	24	5	400	8	105	60	± 8	79
B3-2412SS(H) LF		12	167	7	101	100	± 8	82
B3-2415SS(H) LF		15	134	7	102	120	± 8	82
3) Dual Output SIL Package Style								
B3-0505S(H) LF	5	± 5	± 200	45	513	60	± 8	78
B3-0512S(H) LF		± 12	± 84	42	500	100	± 8	80
B3-0515S(H) LF		± 15	± 67	35	494	120	± 8	81
B3-1205S(H) LF	12	± 5	± 200	26	214	60	± 8	78
B3-1212S(H) LF		± 12	± 84	25	208	100	± 8	80
B3-1215S(H) LF		± 15	± 67	24	208	120	± 8	80
B3-2405S(H) LF	24	± 5	± 200	8	107	60	± 8	78
B3-247R2S(H) LF		± 7.2	± 139	8	107	75	± 8	78
B3-2412S(H) LF		± 12	± 84	7	103	100	± 8	81
B3-2415S(H) LF		± 15	± 67	7	102	120	± 8	82

Mechanical Dimensions (1/2):

SIL Package Style

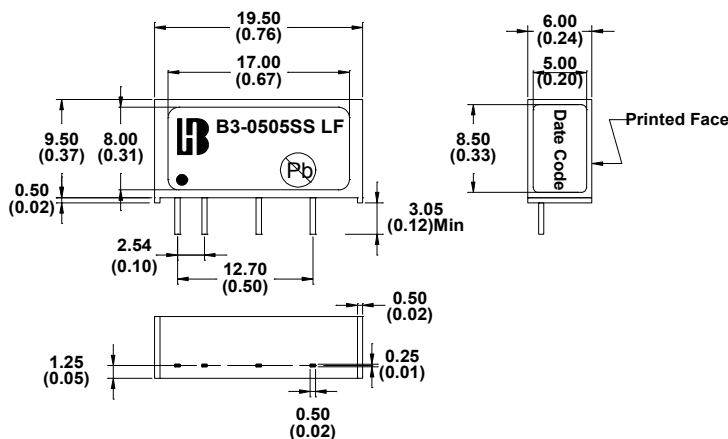


Pin	Single Output		Pin	Dual Output	
	1K Vdc	3K Vdc		1K Vdc	1K Vdc
1	+Vin	+Vin	1	+Vin	+Vin
2	-Vin	-Vin	2	-Vin	-Vin
3	No Pin	No Pin	3	No Pin	No Pin
4	-Vo	No Pin	4	-Vo	No Pin
5	No Pin	-Vo	5	Common	-Vo
6	+Vo	No Pin	6	+Vo	Common
7	No Pin	+Vo	7	No Pin	+Vo

Technical Specification(2/2):

Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)	Output Current (mA) Max	Input Current @No Load (mA) Typ.	Input Current @Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%)Typ.
1) Single Output DIL Package Style								
B3-0505DS(H) LF	5	5	400	45	506	60	± 8	79
B3-0512DS(H) LF		12	167	42	500	100	± 8	80
B3-0515DS(H) LF		15	134	35	494	120	± 8	81
B3-1205DS(H) LF	12	5	400	26	211	60	± 8	79
B3-1212DS(H) LF		12	167	25	208	100	± 8	80
B3-1215DS(H) LF		15	134	24	206	120	± 8	81
B3-2405DS(H) LF	24	5	400	8	105	60	± 8	79
B3-2412DS(H) LF		12	167	7	101	100	± 8	82
B3-2415DS(H) LF		15	134	7	102	120	± 8	82
3) Dual Output DIL Package Style								
B3-0505D(H) LF	5	± 5	± 200	45	513	60	± 8	78
B3-0512D(H) LF		± 12	± 84	42	500	100	± 8	80
B3-0515D(H) LF		± 15	± 67	35	494	120	± 8	81
B3-1205D(H) LF	12	± 5	± 200	26	214	60	± 8	78
B3-1212D(H) LF		± 12	± 84	25	208	100	± 8	80
B3-1215D(H) LF		± 15	± 67	24	208	120	± 8	80
B3-2405D(H) LF	24	± 5	± 200	8	107	60	± 8	78
B3-247R2D(H) LF		± 7.2	± 139	8	107	75	± 8	78
B3-2412D(H) LF		± 12	± 84	7	103	100	± 8	81
B3-2415D(H) LF		± 15	± 67	7	102	120	± 8	82

Mechanical Dimensions (2/2):

DIL Package Style

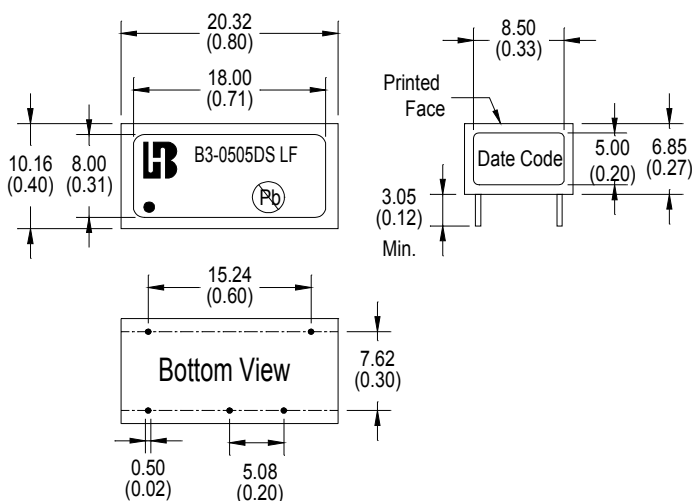

Pin	1K Vdc-Single		Pin	Pin	3K Vdc-Single		Pin
1	-Vin	+Vin	14	1	-Vin	+Vin	14
2	No Pin	No Pin	13	2	No Pin	No Pin	13
3			12	3			12
4			-Vo	11			4
5	No Pin	No Pin	10	5	No Pin	No Pin	10
6	+Vo	+Vo	9	6	No Pin	No Pin	9
7	NC	No Pin	8	7	NC	+Vo	8

Pin	1K Vdc-Dual		Pin	Pin	3K Vdc-Dual		Pin
1	-Vin	+Vin	14	1	-Vin	+Vin	14
2	No Pin	No Pin	13	2	No Pin	No Pin	13
3			12	3			12
4			-Vo	11			4
5	No Pin	No Pin	10	5	No Pin	No Pin	10
6	+Vo	+Vo	9	6	Common	Common	9
7	NC	Common	8	7	NC	+Vo	8