


Features:

- Input Filter With Internal Capacitor
- Input / Output Isolation 1.5K Vdc Or 2K Vdc
- Low Ripple And Noise
- 100% Burn-In
- Regulated type
- Net Weight : 3 g Typical
- 16 Pin SMD Package
- Custom Design Available

Technical Specification:

Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)	Output Current (mA) Max	Input Current @No Load (mA) Typ.	Input Current @Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%)Typ.
1) 1K Vdc Isolation								
CSU0509 LF	5	9	200	30	456	70	± 8	79
CSU0509EH LF		9	200	38	486	70	± 8	74
CSU1209 LF	12	9	200	18	188	70	± 8	80
CSU1209EH LF		9	200	21	197	70	± 8	76
1) 2K Vdc Isolation								
CSU0509-20 LF	5	9	200	30	456	70	± 8	79
CSU0509EH-20 LF		9	200	38	486	70	± 8	74
CSU1209-20	12	9	200	18	188	70	± 8	80
CSU1209EH-20 LF		9	200	21	197	70	± 8	76

Mechanical Dimensions:

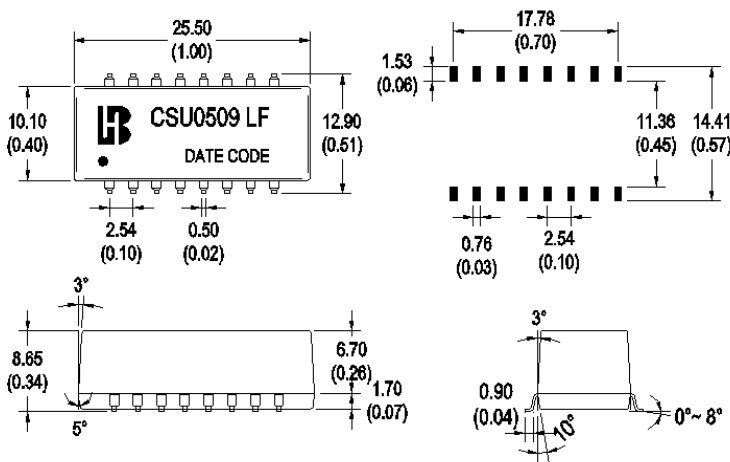

Pin	1K & 2K Vdc - Single	Pin
1	-Vin	16
2	Ve*	15
3	+Vin	14
4	NC	13
5		12
6		11
7	+Vo	10
8	-Vo	9