



Features

- 7 pin SIP package
- Input / Output Isolation Voltage: 6.4kVDC
- High Efficiency
- Lead Free Design, RoHS Compliant
- Operating temperature: -40°C to +85°C
- Optional Reinforced Isolation 8kVDC



Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Reinforced Isolation 8kVDC	Input Voltage Range(V)	Output Voltage (V)	Output Current (mA)	Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)		
				Full Load	No Load	Full Load				
HBA2-05S0H6	HBA2-05S0H8	4.5 ~ 5.5 Nominal: 5	3.3	600	70	563	75	3300		
HBA2-05S1H6	HBA2-05S1H8		5	400		541	78	1200		
HBA2-05SBH6	HBA2-05SBH8		7.2	278		541	78	1200		
HBA2-05SAH6	HBA2-05SAH8		9	222		526	80	1200		
HBA2-05S2H6	HBA2-05S2H8		12	167		519	81	680		
HBA2-05S3H6	HBA2-05S3H8		15	132		513	82	680		
HBA2-05D0H6	HBA2-05D0H8		±3.3	±300		571	74	±1500		
HBA2-05D1H6	HBA2-05D1H8		±5	±200		548	77	±470		
HBA2-05DBH6	HBA2-05DBH8		±7.2	±139		548	77	±470		
HBA2-05DAH6	HBA2-05DAH8		±9	±111		533	79	±470		
HBA2-05D2H6	HBA2-05D2H8		±12	±85		526	80	±330		
HBA2-05D3H6	HBA2-05D3H8		±15	±66		519	81	±330		
HBA2-12S0H6	HBA2-12S0H8		10.8 ~ 13.2 Nominal: 12	3.3		600	30	235	75	3300
HBA2-12S1H6	HBA2-12S1H8			5		400		225	78	1200
HBA2-12SBH6	HBA2-12SBH8	7.2		278	225	78		1200		
HBA2-12SAH6	HBA2-12SAH8	9		222	219	80		1200		
HBA2-12S2H6	HBA2-12S2H8	12		167	216	81		680		
HBA2-12S3H6	HBA2-12S3H8	15		132	214	82		680		
HBA2-12D0H6	HBA2-12D0H8	±3.3		±300	238	74		±1500		
HBA2-12D1H6	HBA2-12D1H8	±5		±200	228	77		±470		
HBA2-12DBH6	HBA2-12DBH8	±7.2		±139	228	77		±470		
HBA2-12DAH6	HBA2-12DAH8	±9		±111	222	79		±470		
HBA2-12D2H6	HBA2-12D2H8	±12		±85	219	80		±330		
HBA2-12D3H6	HBA2-12D3H8	±15		±66	216	81		±330		



Model Number	Reinforced Isolation 8kVDC	Input Voltage Range(V)	Output Voltage (V)	Output Current (mA)	Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)
				Full Load	No Load	Full Load		
HBA2-15S0H6	HBA2-15S0H8	13.5 ~ 16.5 Nominal: 15	3.3	600	25	188	75	3300
HBA2-15S1H6	HBA2-15S1H8		5	400		180	78	1200
HBA2-15SBH6	HBA2-15SBH8		7.2	278		180	78	1200
HBA2-15SAH6	HBA2-15SAH8		9	222		175	80	1200
HBA2-15S2H6	HBA2-15S2H8		12	167		173	81	680
HBA2-15S3H6	HBA2-15S3H8		15	132		171	82	680
HBA2-15D0H6	HBA2-15D0H8		±3.3	±300		190	74	±1500
HBA2-15D1H6	HBA2-15D1H8		±5	±200		183	77	±470
HBA2-15DBH6	HBA2-15DBH8		±7.2	±139		183	77	±470
HBA2-15DAH6	HBA2-15DAH8		±9	±111		178	79	±470
HBA2-15D2H6	HBA2-15D2H8		±12	±85		175	80	±330
HBA2-15D3H6	HBA2-15D3H8		±15	±66		173	81	±330
HBA2-24S0H6	HBA2-24S0H8		21.6 ~ 26.4 Nominal: 24	3.3		600	20	117
HBA2-24S1H6	HBA2-24S1H8	5		400	113	78		1200
HBA2-24SBH6	HBA2-24SBH8	7.2		278	113	78		1200
HBA2-24SAH6	HBA2-24SAH8	9		222	110	80		1200
HBA2-24S2H6	HBA2-24S2H8	12		167	108	81		680
HBA2-24S3H6	HBA2-24S3H8	15		132	107	82		680
HBA2-24D0H6	HBA2-24D0H8	±3.3		±300	119	74		±1500
HBA2-24D1H6	HBA2-24D1H8	±5		±200	114	77		±470
HBA2-24DBH6	HBA2-24DBH8	±7.2		±139	114	77		±470
HBA2-24DAH6	HBA2-24DAH8	±9		±111	111	79		±470
HBA2-24D2H6	HBA2-24D2H8	±12		±85	110	80		±330
HBA2-24D3H6	HBA2-24D3H8	±15		±66	108	81		±330

Input Specifications

Input voltage	5V nominal input	4.5~5.5V
	12V nominal input	10.8~13.2V
	15V nominal input	13.5~16.5V
	24V nominal input	21.6~26.4V
Input filter	Capacitor	

Environmental Specifications

Operating ambient temperature	-40°C to +85°C
Maximum case temperature	+95°C
Storage temperature range	-55°C to +125°C
Relative humidity	95% RH max.

Output Specifications

Output power	2 Watts max.
Voltage accuracy	Nominal Vin and full load ±5% max.



Voltage balance	Dual output	±1% max.
Minimum load		0A
Line regulation	For Vin change of 1%	±1.5% max.
Load Regulation	10% load to full load	10% max. 15% max. (3.3&5Vout models)
Ripple and Noise (20MHz Bandwidth)		200mVp-p max.
Maximum capacitive load		See table
Output short circuit protection		1 second

General Specifications

Efficiency	Nominal input and full load	See table
Isolation voltage	Input to output	6400VDC (1 second)
Isolation resistance	500VDC	10GΩ min.
Isolation capacitance		10pF max.
Switching frequency		80kHz max.
Reliability, calculated MTBF		2×10 ⁶ Hrs

Physical Specifications

Case material		Plastic (UL94 V-0)
Potting material		Epoxy (UL94 V-0)
Dimensions		0.77 × 0.50 × 0.39 Inch (19.5 × 12.5 × 9.8 mm)
Weight		4.3g (0.15oz) typ.


Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.




Mechanical Dimensions

Single output

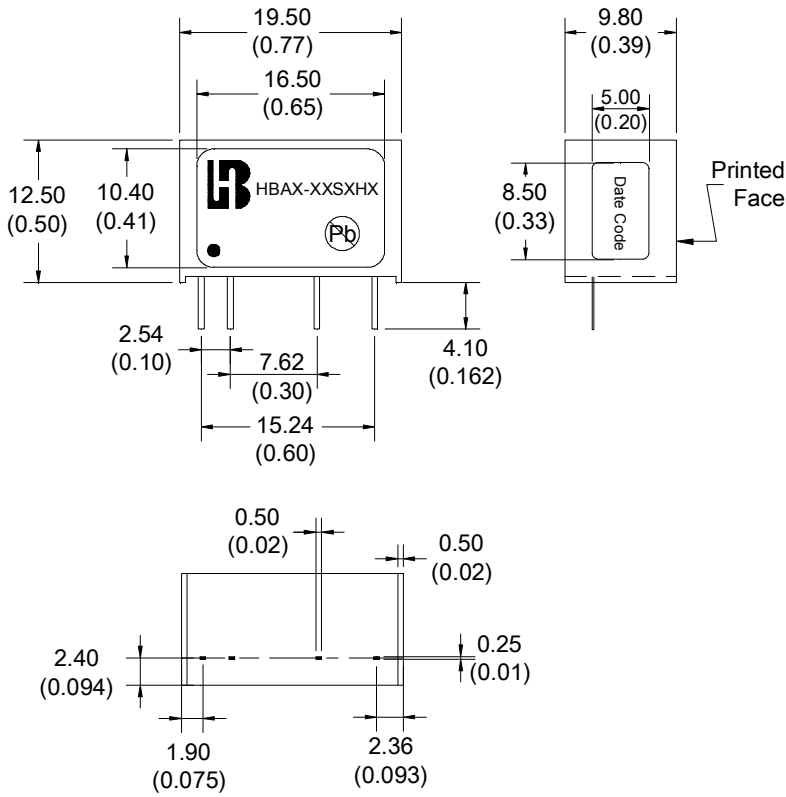

Pin Assignment		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Dual output

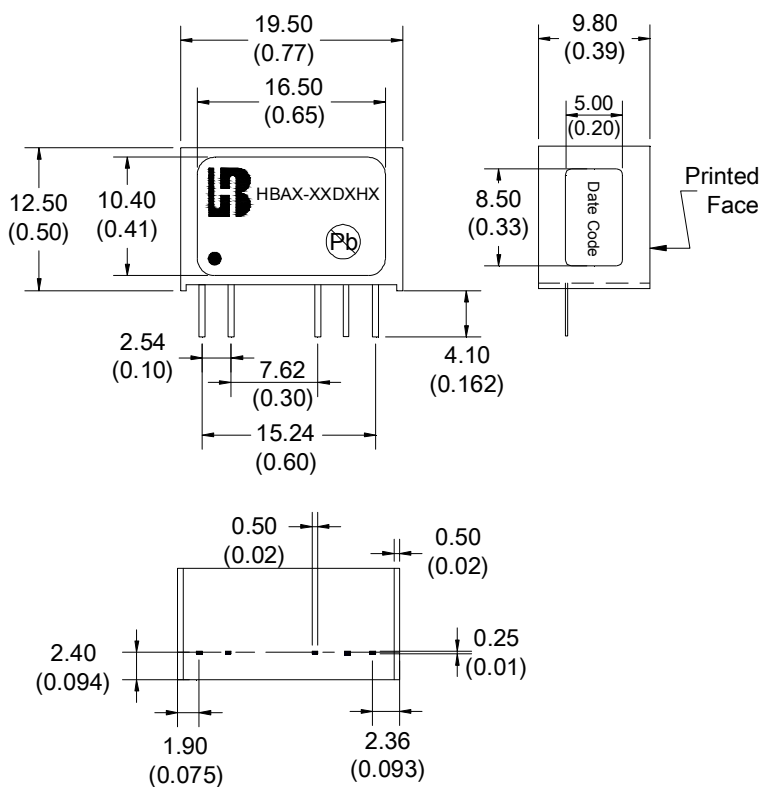

Unit: mm (inch)
Tolerance: XX.XX ±0.25 (±0.01)

Specifications subject to change without notice.